

Two-way, two-position

HLSV-06-224-00



Technical specification

Max. working pressure: 250bar


Max. flow rate: See pressure drop-flow curve

Internal leakage: $\leq 80\text{ml/min}$


Voltage: 12VDC, 24VDC, 110VAC, 220VAC

Minimum working voltage: 90% of working voltage


Oil cleanliness: 25u m or better

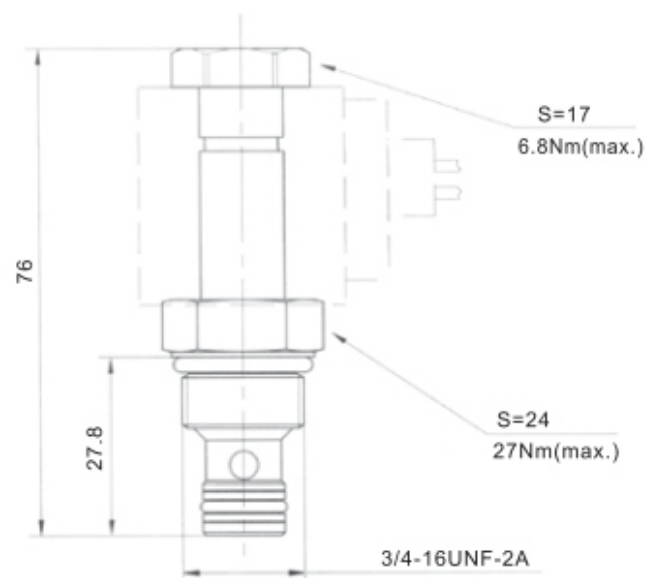Filter net precision: 150meshes/cm²

Symbol

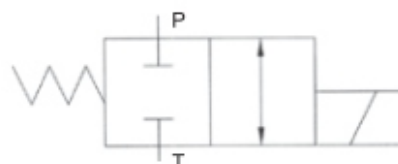

Cavity dimensions

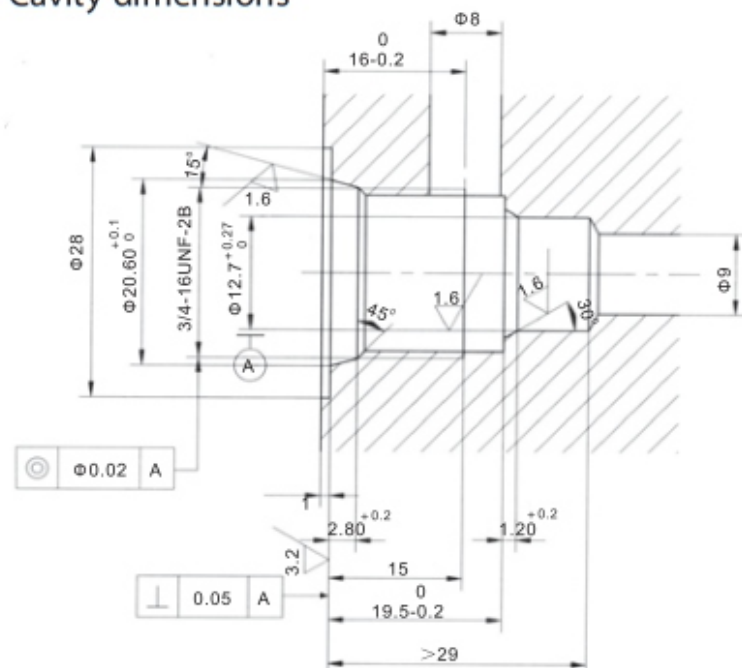

Pressure drop-flow curve

32 cST Oil/45°C
P—T