

Two-way, two-position

HLSV-08-220-00



Technical specification

Max. working pressure: 250bar

Max. flow rate: See pressure drop-flow curve


Internal leakage: ≤ 5 drops/min

Voltage: 12VDC, 24VDC, 110VAC, 220VAC


Minimum working voltage: 90% of working voltage

Oil clearness: 25u m or better


Filter net precision: 150 meshes/cm²

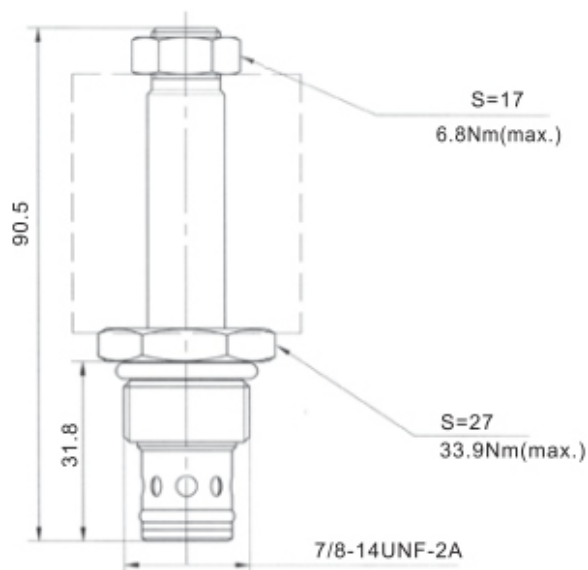

Symbol

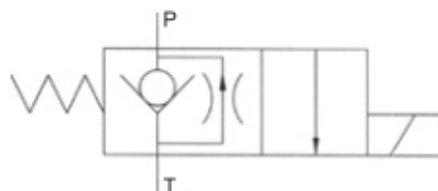

Cavity dimensions

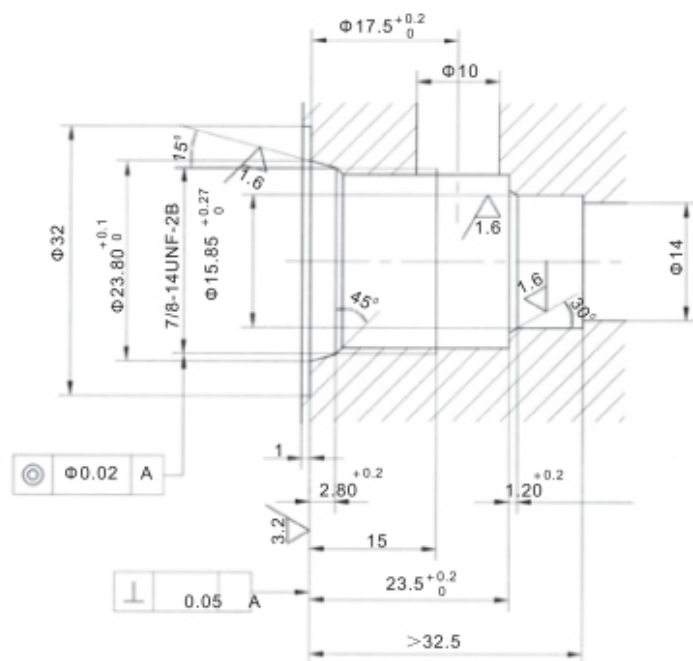

Pressure drop-flow curve

32 cST Oil/45°C

$$\begin{array}{c} P-T \\ T-P \end{array}$$

T—P— —

